


TR – MACHINE FOR ECHINUS

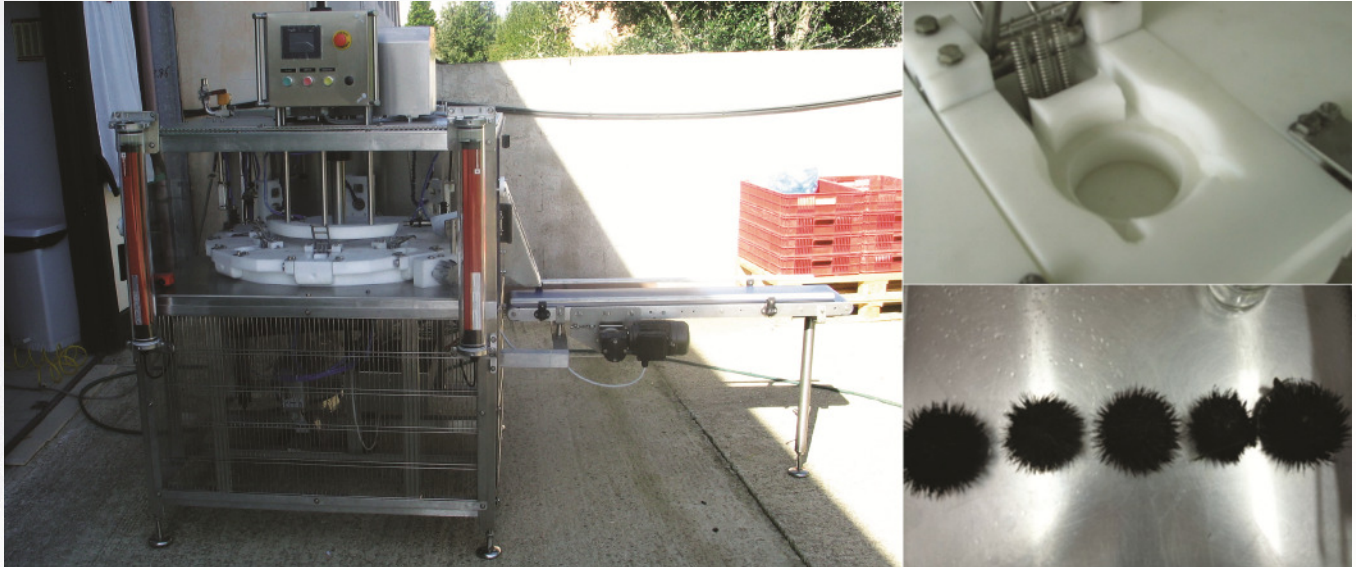

The machine carries out the cutting and the washing of echinus. The operator loads the echinus into a turntable with 8 stations. The first station is for the loading, the second is for the cutting and the remaining stations are for the washing of the echinus by jets of water, without the detachment of eggs. The echinus automatically go on conveyor belt.

TECHNICAL DATA

Construction / Stainless Steel Aisi 304/316

Electric supply / 400V 3PH + T 50 Hz

Pneumatic supply / 6 bar

2500 x 1000 x h 1500 mm

Installed power

Overall machine dimension

Production